

# MEGA<sup>LITE</sup>

## DRAMA LED Z 50 CW



### DESCRIPTION:

MEGA-Lite introduces the DRAMA LED Z50 CW, a hard-edge fixture that can be used in multiple applications. Equipped with a 50W LED lamp, this compact unit can project sharp or soft edged beams ideal for theaters, museums, commercial applications, contemporary use or any project in which a precise spotlight is needed. The Drama LED Z50 CW offers a High Lumen Output for a unique high-performance and consistent optical brilliance. With the capability of a 19°-36° Zoom Range, users have the ability to manually focus and zoom. It is sold as a on/off fixture with the ability to accessorize it with a DMX Controller that features a built-in knob that enables manual dimming of the unit. Equipped with a gobo holder, it can be used to project unique patterns. In addition, the Drama LED Z50 CW includes a rotation on the barrel which allows users to rotate the gobo to their specific need. It is included with a Gobo Holder, Gel Holder and Power Cable.

#### LUMEN OUTPUT



2032 at 18° & 2060 at 36°

#### BARREL ROTATION



ABILITY TO ROTATE  
A GOBO 90°

#### DIMMER KNOB



AVAILABLE WITH DMX  
ACCESSORY

#### ZOOM



19°-36° Zoom Range




# MEGA LITE | DRAMA LED Z50 CW Data Sheet


## SPECIFICATIONS:

<b>FIXTURE:</b>	7057-Drama LED Z50 CW
<b>DMX CONNECTORS:</b>	3 or 5 pin XLR connectors in/out (Specified at Ordering)
<b>POWER CONNECTIONS:</b>	Nema 5-15 to Screw Type Base Connector Cable Mounted
<b>THERMAL:</b>	Max ambient temp: 40° Max surface temp: 60°
<b>FASTENING SYSTEM:</b>	Single Mounting Yoke
<b>DISPLAY:</b>	Digital
<b>GOBO DIAMETER:</b>	45mm
<b>IMAGE DIAMETER:</b>	25mm
<b>BARREL ROTATION:</b>	90°
<b>LED TYPE:</b>	1 COB LED
<b>LED WATTS:</b>	50
<b>LED COLOR TEMP:</b>	3136K
<b>LED LIFETIME:</b>	60,000 to 100,000 hours
<b>CRI:</b>	81.9
<b>ZOOM RANGE:</b>	19° to 36°
<b>POWER CONSUMPTION:</b>	Universal 100-240V 50/60 Hz
<b>BALLAST:</b>	Electronic Watts: 49 Amps: .65 PF: .63
<b>DMX MODES:</b>	3 Operating modes
<b>PROTOCOL:</b>	DMX 512
<b>OPERATING MODE:</b>	Stand Alone 255 Step Dimmer Setting via Display on DMX Controlled Fixtures
<b>DMX CHANNELS:</b>	3 Mode of Operation Mode A 1 Channel On/Off Mode P 1 Channel Dimmer Mode F 2 Channel Dimmer/ Strobe

## SPECTRUM

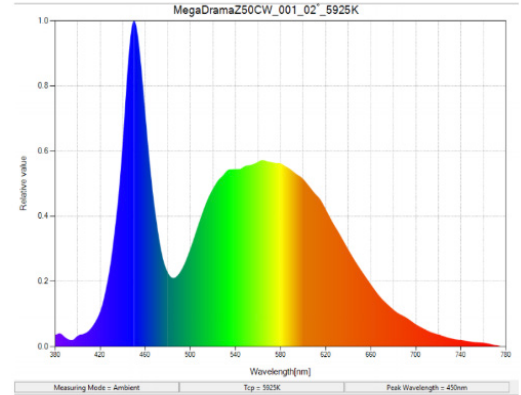


## CRI SAMPLES

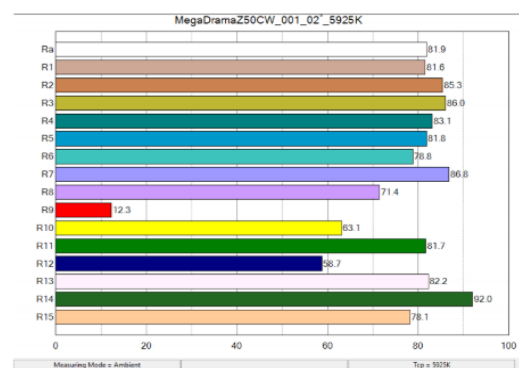

## ACCESSORIES:

<b>INCLUDED</b>	<b>PART NUMBER</b>
<b>POWER CABLE:</b>	7050-CAB
<b>GOBO HOLDER:</b>	7050-ACC-GOB
<b>GEL HOLDER:</b>	7050-ACC-GEL
<b>AVAILABLE</b>	
<b>REMOVEABLE IRIS:</b>	7050-IRIS
<b>DMX CONTROLLER 3 PIN</b>	7057-CON-3
<b>DMX CONTROLLER 5 PIN</b>	7057-CON-5

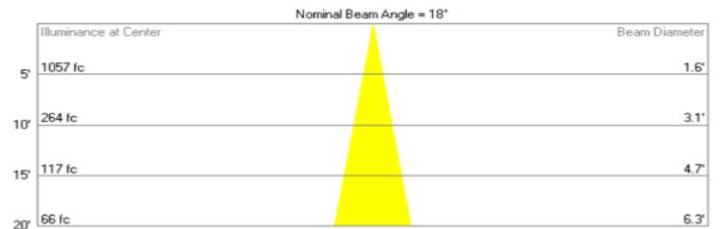

Lens	Lumens at full output	Efficacy
Zoom at 18°	2032	41lm/W
Zoom at 36°	2060	42 lm/W

## PHYSICAL SIZE:

**FIXTURE:**  
Size: 16.5"L x 8"W x 12.5"H  
Weight: 7.5 lb

### PACKAGED FOR SHIPPING:

Size: 19.25" x 7.5" x 7.5"  
Weight: 9 lb

